





# CITY OF LODI

PUBLIC WORKS DEPARTMENT

## Square-Type Curb, Gutter, Sidewalk and Residential

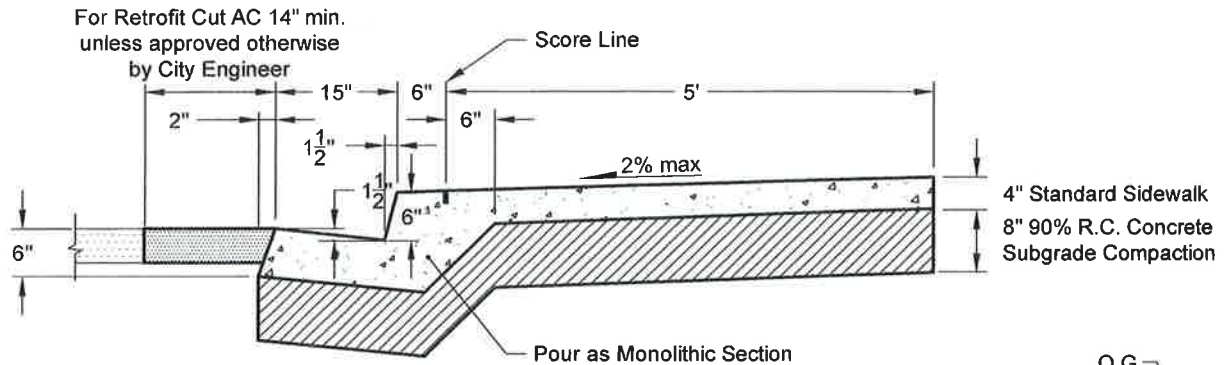


Curb, Gutter, & Sidewalk Section

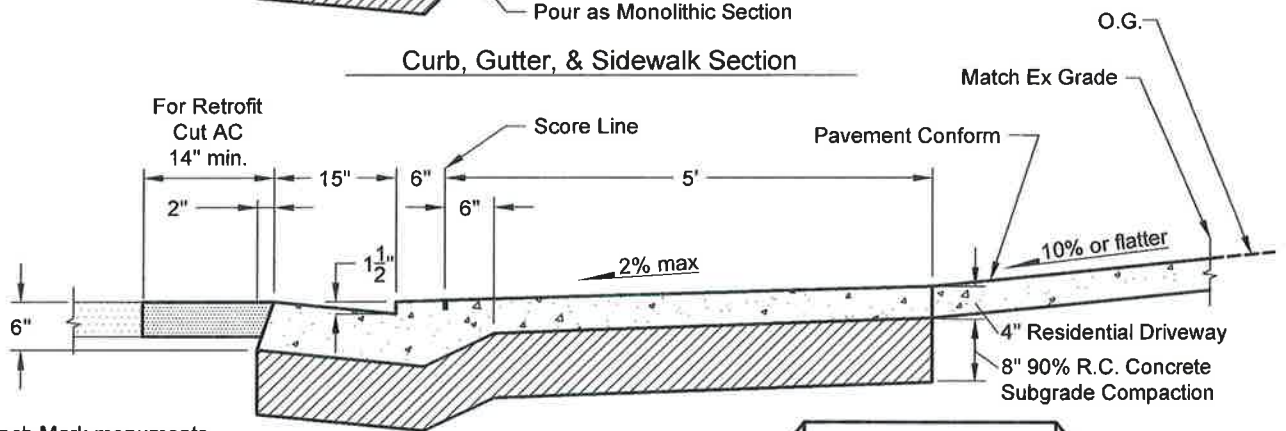

Residential Driveway Section

Bench Mark monuments will be furnished by the City of Lodi, when required, and shall be installed by the contractor as directed by City Engineer

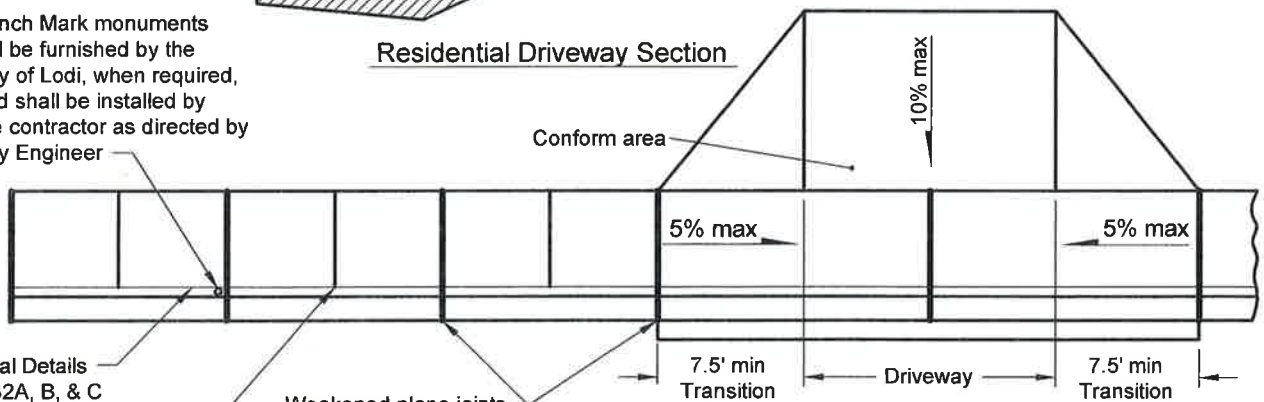


Ramp Typical Details Std. Plan 132A, B, & C

Score lines at 5.5'

Weakened plane joints See Note 1

Plan

If joint is greater than 1/4" wide it shall be filled with petrolastic material.

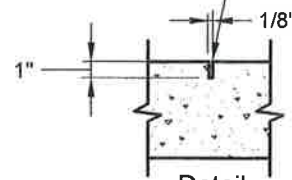

Detail  
Weakened Plane Joint

**Notes:**

1. Construct weakened plane joints at 11' intervals, at ends of driveway transitions, and at center of driveway.
2. Use impervious membrane cure. Broom finish.
3. Class B concrete per Section 90 of Std. Spec., 1 1/2" max. aggregate.
4. Construct expansion joints at 200' max.
5. All exposed edges shall be rounded to 1/2" radius.

Dr. KT, JP	No. 1	Date 9/07	Revision MINOR REVISIONS	Appr.	Approved By:	11/8/17 Date	STD PLAN 112
Ch. LC	No. 2	Date 9/17	Revision RAMP SLOPE FROM 8 TO 5%				
Date							

Lyman Chang  
City Engineer  
RCE No. 53149